

2.2 Power Supply Module PS 307; 2 A; (6ES7307-1BA00-0AA0)

Order number

6ES7307-1BA00-0AA0

Characteristics

The PS 307 power supply module (2 A) has the following salient features:

- Output current 2 A
- Output voltage 24 VDC; proof against short-circuit and open circuit
- Connection to single-phase AC system
(input voltage 120/230 VAC, 50/60 Hz)
- Reliable isolation to EN 60 950
- Can be used as load power supply

Wiring schematic of the PS 307; 2 A

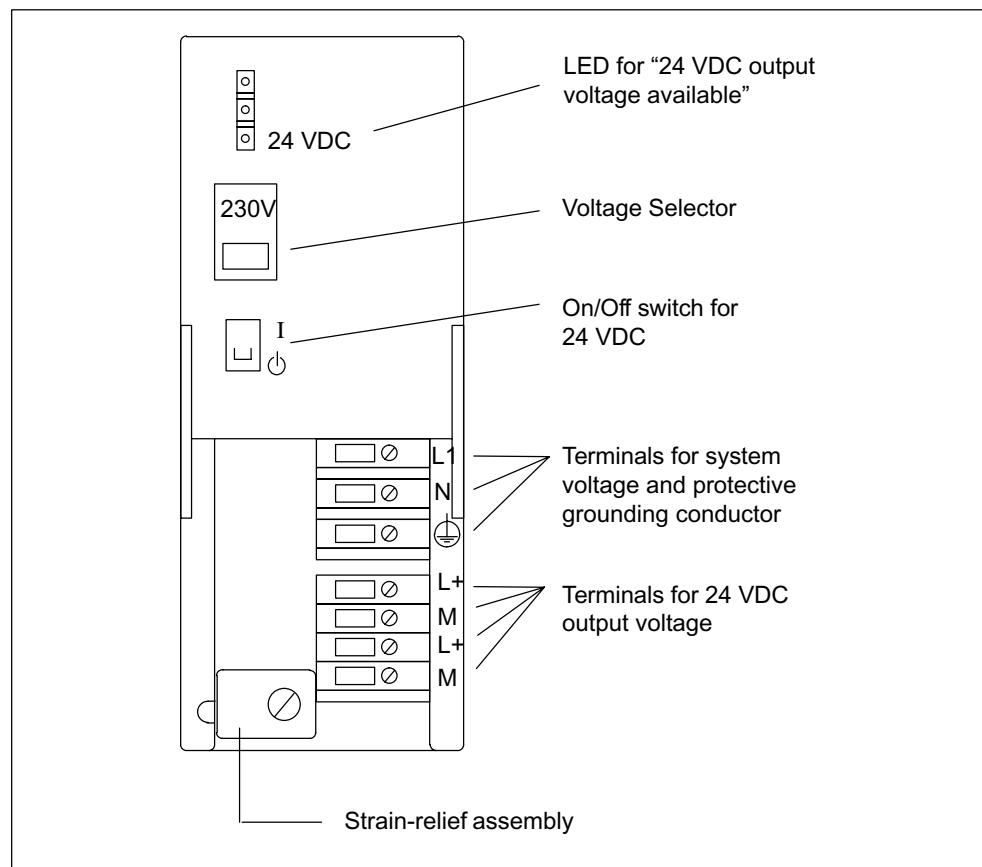


Figure 2-3 Wiring Schematic of the PS 307 Power Supply Module (2 A)

Basic circuit diagram of the PS 307; 2 A

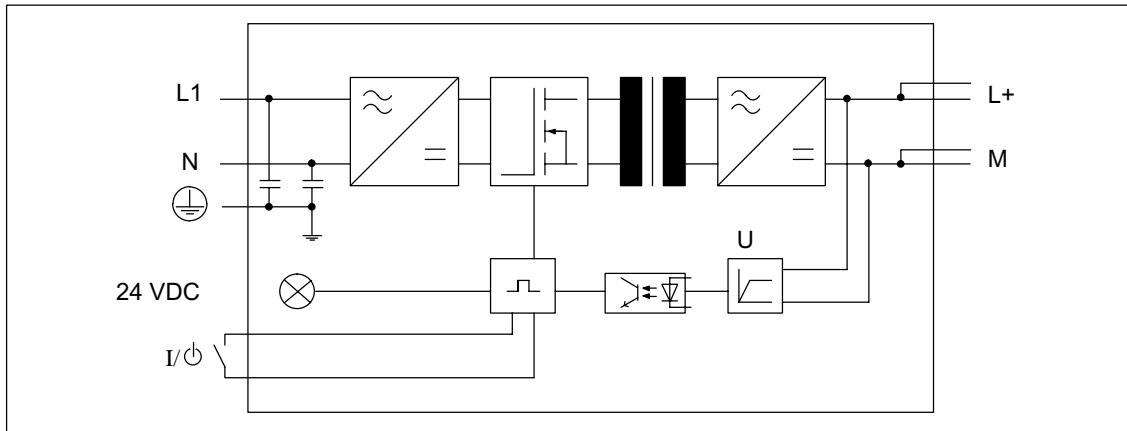


Figure 2-4 Basic Circuit Diagram of the PS 307 Power Supply Module (2 A)

Line protection

We recommend that you install a miniature circuit-breaker (MCB) (for example Siemens 5SN1 series) with the following rating to protect the incoming supply cable of the PS 307 power supply module (2 A):

- Rated current at 230 VAC: 6 A
- Tripping characteristic (type): C.

Reaction to atypical operating conditions

Table 2-2 Reaction of the PS 307 Power Supply Module (2 A) to Atypical Operating Conditions

If Then ...	24 VDC LED
... the output circuit is overloaded: • $I > 2.6$ A (dynamic) • $2 A < I \leq 2.6$ A (static)	Voltage dip, autom. volt. recovery Voltage drop, shortening of service life	Flashes
... the output is short-circuited	Output voltage 0 V; automatic voltage recovery after short circuit has been eliminated	Dark
An overvoltage occurs on the primary side	Possible destruction	-
There is an undervoltage on the primary side	Automatic disconnection; automatic voltage recovery	Dark

Technical specifications of the PS 307; 2 A (6ES7307-1BA00-0AA0)

Dimensions and Weight		Other Parameters	
Dimensions W × H × D (in millimeters)	50 × 125 × 120	Protection class according to IEC 536 (DIN VDE 0106, Part 1)	I, with protective grounding conductor
Weight	Approx. 420 g	Insulation	
Input Rating		• Rated insulation level (24 V to L1)	250 VAC
Input voltage	120 / 230 VAC	• Tested with	2800 VDC
System frequency		Reliable isolation	SELV circuit
• Rated value	50 Hz or 60 Hz	Bridging of power failures (at 93 and/or 187 V)	min. 20 ms
• Permitted range	47 Hz to 63 Hz	• Repeat rate	min 1 s
Rated input current		Efficiency	83 %
• At 230 V	0.5 A	Power input	58 W
• At 120 V	0.8 A	Power loss	typ. 10 W
Inrush current (at 25°C)	20 A	Diagnostics	
I ² t (at inrush current)	1 A ² s	LED for output voltage available	Yes, green LED
Output Rating			
Output voltage			
• Rated value	24 VDC		
• Permitted range	24 V ± 5 %, stable at no load		
• Ramp-up time	max. 2.5 s		
Output current			
• Rated value	2 A, Cannot be connected in parallel		
Short-circuit protection	Electronic, nonlatching, 1.1 to 1.3 × I _N		
Residual ripple	max. 150 mV _{ss}		